

ARMoured COURTESY HOT LINE PHONE PT-M-KT2

Stainless steel shell, automatic dial-up when pick up, speed dial supported, dustproof and anti vandal

PT-M-KT2 speed dial telephone is widely used in banks, schools, residential areas, stations, subways and other places to call customer service hotline for help with the alarm. the shell of the whole phone is imported steel plate, which has good waterproof and vandal resistance performance. the motherboard is stable, use the latest Austria voice chip, the main control chipset is the USA ATMEL company industrial grade microcontroller, to ensure stable work in the harsh environments



Features

- *size:300*230*65mm
- *weight: 4.0KG
- *Wall-mounted or desktop
- *Waterproof and dustproof, anti-vandal
- *ABS armoured cord handset
- *Stainless steel housing and metal keypad
- *Can prestore groups of numbers, pick up automatically make emergency call
- *Waterproof protection:IP65-IP67
- *Auto dial,hot line dial and auto answer can be supported
- *Self stop if the other side hang up
- *Phone line for power supply, no external power supply
- *Microphone sensitivity can be adjusted
- *Volume can be adjusted
- *Analog telephone, VoIP and GSM available

Usage condition

Temperature	-10℃~+50℃	Relative humidity	45%-75%
Atmospheric pressure	86~106Kpa	Environmental noise	less than 90dB
Usage condition	24-60V PBX telephone	Ringling Level	70-90V
Busy tone	300~450HZ, interval between 300-500ms		
Telephone line current	>=20mA		

Telephone parameters

Power supply mode	telephone line for power supply or DC5V
DTMF dialing parameters	




Specialized in emergency telephone solution

Low frequency group frequency	697.770.852.941HZ
High frequency group frequency	1209.1336.1477HZ
Frequency deviation	≤ 1.5%;
Low frequency group level	-9 + 3dB;
High frequency group level	-7 + 3dB
Level difference between the high and low level frequency	2 + 1dB
Harmonic total distortion at least low 20dB than the fundamental level	
Ringing tone decibel	70dB
Speaker decibel	90dB (external power supply)
Phone impedance	600 Ω
Memory	EEPROM (power off without loss data)
Interface	RJ11 or 2P terminal
Parameter setting	by keyboard DTMF dial set

Related products



Drawings

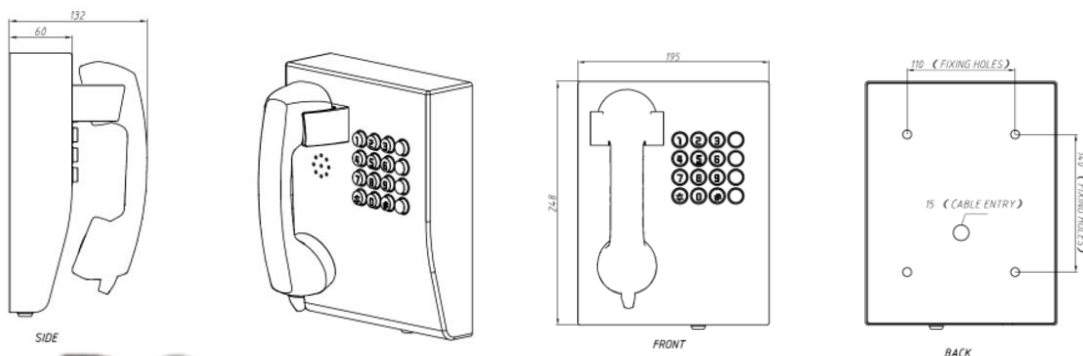

Specialized in emergency telephone solution